

⚡ Specifications

Nominal Voltage(V)

6V

Nominal Capacity

20 hour rate	(0.35A to 5.25V)	7Ah
10 hour rate	(0.665A to 5.25V)	6.65Ah
5 hour rate	(1.19A to 5.1V)	5.95Ah
1 C	(7A to 4.8V)	3.5Ah
3 C	(21A to 4.8V)	3.15Ah

Weight

Approx. 1.23kg(2.71Lbs.)

Internal Resistance (at 1KHz)

Approx. 10.5 mΩ

Maximum Discharge Current for

5 seconds: 105A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	7.20 to 7.50V
Coefficient	-5.0mV/°C/cell
Maximum Charging Current :	2.1A
Standby use:	
Float Charging Voltage	6.75 to 6.90V
Coefficient	-3.0mV/°C/cell

Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB
Option: Flammability resistance of (UL94 V-0)

Design Life



EUROBAT(20°C): 3-5 YEARS STANDARD COMMERCIAL



⚡ Dimensions






Length (L)	151±1 (5.94±0.04)
Width (W)	34±1 (1.34±0.04)
Height (H)	94±1 (3.70±0.04)
Overall Height (HT)	100±1 (3.94±0.04)

mm(inch)

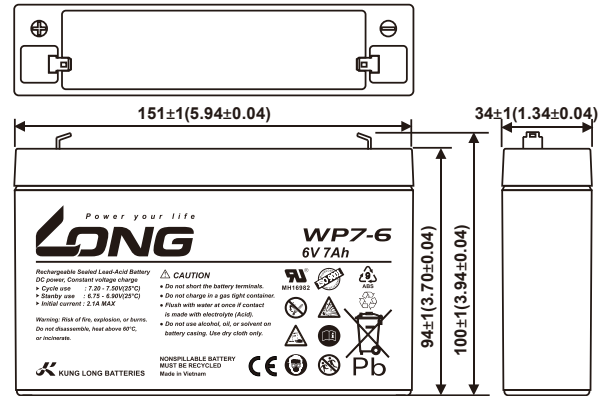

Terminal

F1 or F2 (Faston Tab 187 or 250)



151025-1K