

⚡ Specifications

Nominal Voltage(V)

12V

Nominal Power

15 mins rate: 245W/cell to 1.67V/cell

Nominal Capacity

20 hour rate	(3.25A to 10.50V)	65Ah
10 hour rate	(6.175A to 10.50V)	61.75Ah
8 hour rate	(7.475A to 10.50V)	59.8Ah
5 hour rate	(11.05A to 10.20V)	55.25Ah

Weight

Approx. 20.5kg(45.1 Lbs.)

Internal Resistance (at 1KHz)

Approx. 6mΩ

Maximum Discharge Current for

5 seconds: 780A

Short Circuit Current (A) IEC 60896-21-22

1700A

Charging Methods at 25°C(77°F)

Maximum Charging Current :	19.5A
Boost Charging Voltage	14.10 to 14.40V
Boost Charge Time	8-9Hr
Float Charging Voltage	13.50 to 13.65V
Coefficient	-3.0mV/°C/cell

Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	98%
3 month	96%
6 month	94%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Battery Construction

Component	Positive Plate	Negative plate	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	Rubber	Copper	AGM	Sulfuric acid



⚡ Dimensions

Length (L)

350±²₁ (13.78±^{0.08}_{0.04})

Width (W)

167±²₁ (6.57±^{0.08}_{0.04})


Height (H)

179±²₁ (7.05±^{0.08}_{0.04})

Overall Height (HT)

179±²₁ (7.05±^{0.08}_{0.04})

mm(inch)

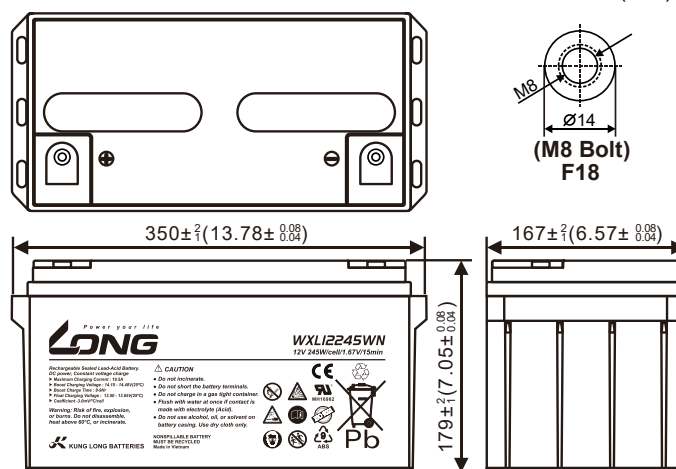

Terminal





F18

Recommended torque value M8: 12 N-m (122 kgf-cm)

Maximum allowable torque value M8: 20 N-m (204 kgf-cm)

Design Life

EUROBAT(20°C) : >12 YEARS VERY LONG LIFE

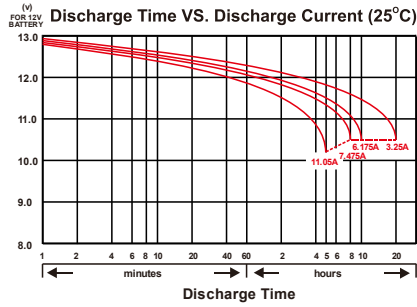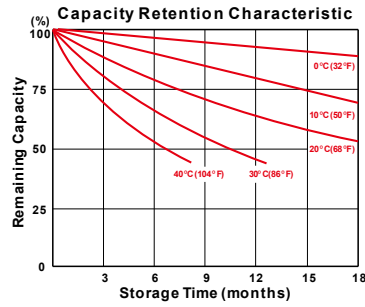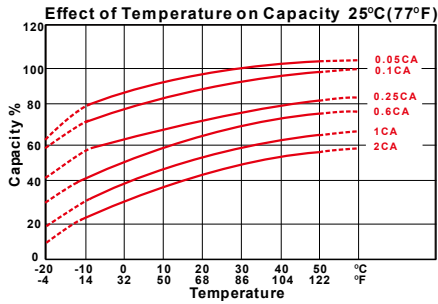

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
2	min	328	388	440	490	525	555	590
4	min	268	308	347	382	417	452	485
5	min	251	291	323	353	383	411	436
8	min	219	248	273	298	315	331	342
10	min	205	230	254	274	289	302	312
15	min	190	210	227	240	245	249	251
30	min	114	126	135	141	144	147	149
45	min	88.2	95.4	101	103	105	106	107
60	min	73.3	79.0	83.0	84.3	85.0	85.5	85.9
90	min	58.9	60.6	62.1	62.9	63.2	63.3	63.4
120	min	46.1	47.9	49.5	50.0	50.2	50.4	50.5
180	min	32.7	33.6	34.3	34.8	35.0	35.2	35.3
240	min	26.3	27.1	27.8	28.1	28.2	28.3	28.4
300	min	21.9	22.6	23.2	23.4	23.5	23.6	23.6
480	min	15.0	15.6	16.0	16.1	16.2	16.2	16.3
600	min	12.6	13.0	13.3	13.3	13.4	13.5	13.5
1200	min	6.55	6.77	6.87	6.91	6.93	6.94	6.95

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
2	min	175	215	245	275	302	327	350
4	min	140	170	195	220	245	270	285
5	min	136	161	182	202	219	236	250
8	min	110	130	150	167	181	195	205
10	min	105	125	140	155	162	169	172
15	min	95.5	109	120	130	135	140	145
30	min	51.2	60.7	69.2	77.2	77.5	77.8	78.0
45	min	45.2	50.1	54.5	58.5	59.3	59.8	60.0
60	min	37.0	39.7	42.0	43.5	44.5	44.8	45.0
90	min	29.8	31.1	32.2	33.0	33.5	33.7	33.8
120	min	23.5	24.3	25.0	25.6	26.0	26.2	26.3
180	min	16.5	17.1	17.6	17.9	18.0	18.1	18.2
240	min	13.2	13.6	14.0	14.1	14.2	14.3	14.4
300	min	10.9	11.3	11.6	11.7	11.8	11.9	12.0
480	min	7.44	7.69	7.88	7.93	7.96	7.98	8.00
600	min	6.20	6.39	6.55	6.60	6.62	6.64	6.65
1200	min	3.25	3.36	3.41	3.43	3.44	3.45	3.45

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)